


# R4-593

## 4" SQUARE ADJUSTABLE BAFFLE TRIM

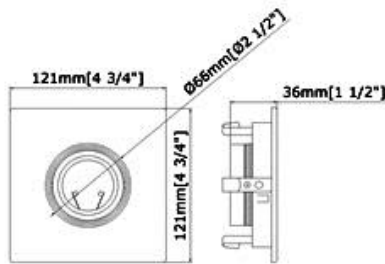

Project

Location

### PRODUCT DESCRIPTION

4" Square adjustable baffle trim

To be used in low and line voltage applications.

Trim will adjust 35 degrees from vertical position.

**LAMPING:** Accommodates an MR-16 or GU-10 bulb. Please see housing for maximum wattage allowed according to selection.

Painted finishes are powder coated for abrasion resistance, clear lens included. Steel metal clips secure to housing.

**DIAMETER:** 4 3/4"

**FINISHES:** Matte White (MW)

Beach Lighting trims are certified to be used only with Beach Lighting housings. Any Beach Lighting trim used with a different manufacturer's housing will void our certification and our warranty.

MODEL	FINISH
R4-593	MW

### COMPATIBLE HOUSINGS

Model	Description
R4-050	4" LOW VOLTAGE NON IC REMODEL HOUSING REMOTE TRANSFORMER (NOT SUPPLIED) 50W MAX MR-16
R4-19AT	4" LINE VOLTAGE NON IC AIRTITE NEW CONSTRUCTION HOUSING <b>WHEN USED WITH A GU-10 WHIP</b>
R4-19RAT	4" LINE VOLTAGE NON IC AIRTITE REMODEL HOUSING <b>WHEN USED WITH A GU-10 WHIP</b>
R4-499AT	4" LOW VOLTAGE NON IC AIRTITE NEW CONSTRUCTION HOUSING 50W MAX MR-16
R4-499ICA	4" LOW VOLTAGE IC AIRTITE NEW CONSTRUCTION HOUSING 35W MAX MR-16
R4-499RAT	4" LOW VOLTAGE NON IC AIRTITE REMODEL HOUSING 50W MAX MR-16
R4-499SAT	4" LOW VOLTAGE NON IC AIRTITE NEW CONSTRUCTION HOUSING 50W MAX MR-16
R4-499SRAT	4" LOW VOLTAGE NON IC AIRTITE REMODEL HOUSING 50W MAX MR-16
R4-G19AT	4" LINE VOLTAGE NON IC AIRTITE NEW CONSTRUCTION HOUSING 50W MAX GU-10
R4-G19ICA	4" LINE VOLTAGE IC AIRTITE NEW CONSTRUCTION HOUSING 35W MAX GU-10
R4-G19RAT	4" LINE VOLTAGE NON IC AIRTITE REMODEL HOUSING 50W MAX GU-10
R4-G19ICAT-LED	4" LINE VOLTAGE IC AIRTITE NEW CONSTRUCTION HOUSING 8W MAX LED GU-10
R4-G19ICRAT-LED	4" LINE VOLTAGE IC AIRTITE REMODEL HOUSING 8W MAX LED GU-10