

## R4-497IC-10W-3D-MW

4" ROUND LED RECESSED GIMBAL DOWNLIGHT

# GIMBAL DOWN LIGHT

| Project  |  |      |
|----------|--|------|
| Customer |  | Date |
| Address  |  |      |

## Features

### Body

Durable, Airtight, Aluminum body with etched white polycarbonate diffuser lens for low glare. Includes two spring loaded clips to attach to any ceiling material. The slim profile allows mounting under joists or duct work.

### Beam Spread

The fixture provides a 180° rotation with a 45° beam spread.

### Location


Suitable for damp locations.

### LED Specifications

This light fixture is equipped with a 10 watt LED module that sustains constant efficiency by generating up to 750 lumens; with a typical CRI greater than 80 and a 50,000 hour life span. Available in 3000K. IC Rated: Can have direct contact with insulation.

### LED Driver

Extruded aluminum hardware box with 210mA dimmable class II electronic LED driver with 100-135V AC input. Includes 18" cable from driver to fixture.

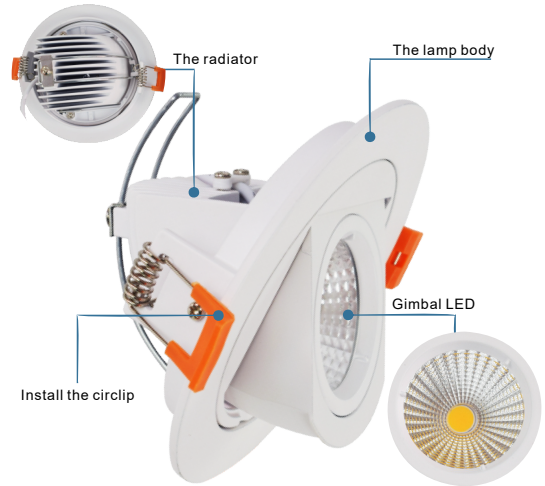

| SPECIFICATION     |                       |
|-------------------|-----------------------|
| Application       | Ceiling Surface Mount |
| Approved Location | Damp                  |
| Beam Angle        | 45°                   |
| CCT               | 3000K                 |
| Certification     | Cetlus                |
| Class II          | Class II              |
| Colour            | Matte White           |
| CRI               | >80                   |
| Dimming           | 10%-100% (120V only)  |
| Input             | AC120V 50/60HZ        |
| LM79              | Yes                   |
| LM80              | Yes                   |
| Lumens            | 750                   |
| Lumens per Watt   | 75                    |
| Power Factor      | >0.98                 |
| Projected Life    | 70% @ 50,000 hrs      |
| Warranty          | 3 years               |
| Wattage           | 10W                   |

## Description

The Beach Lighting 4" 10W Gimbal LED Panel Light is suitable for most indoor locations


## Accessories

Extension Cables that connect fixture to driver:

**BL-FLEX6** 6 ft extension cable

**BL-FLEX10** 10 ft extension cable

## Dimensions

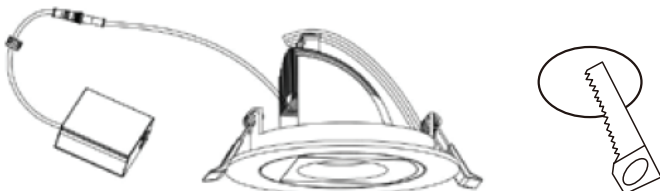

5 1/4" W x 3 1/4"H

Cut Out: 4 1/4"



Due to our continued efforts to improve our products, product specifications are subject to change without notice.