



L6BLRW-10W-3/4K-D90-MW

6" Round LED Recessed Dome Light

IC RATED

DOME LIGHT

SWITCH SELECTABLE COLOR TEMPERATURE

Features

Body

Die cast aluminum body material with good heat dissipation. Independent drive junction box, easy to replace. Can be installed in 0.5" to 1 1/4" thick ceilings. Safe isolated power supply. Flicker-free, stable dimming. Beach Lighting Interior Dome Light is designed to reduce glare and improve overall light quality.

LED Characteristics

This general application light fixture features a 10 watt LED strip that maintains uniform intensity producing up to 650 lumens; with a typical CRI of 90+ and a 50,000 hour life span. Available in 3000K to 4000k color temperature

Dimming

10%-100% dimming capability. This fixture is compatible with industry standard TRIAC/ELV dimmers (contact factory for listing of compatible dimmers).

Mounting

6" Round LED Dome Light provides surface mount light for new construction or remodel applications. Cut Hole in ceiling and snap fixture in opening with attached spring clips. 2" above ceiling clearance required for driver.

Operating Temperature

-20°C~40°C

Environment

Suitable for Damp locations. Suitable for insulated ceiling applications.

MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With Attached Spring Clips

SPECIFICATION	
Application	Ceiling Surface Mount
Approved Location	Damp
Beam Angle	100°
CCT	3000K to 4000K
Certification	cETLus
Class II	Yes
Colour	Matte White
CR1	90
Dimming	10%-100% (120V only)
Dimming Tech	TRIAC/ELV
Input	AC120V 50/60HZ
LM79	Yes
LM80	Yes
Lumens	650
Lumens per Watt	65
Power Factor	>0.95
Projected Life	70% @ 50,000 hrs
Warranty	3 years
Wattage	10W



Description


The Beach Lighting 6" 10W LED Panel is ideal for all rooms, closets, work rooms, basements, and attics, etc.

Height: 2 4/8"
Diameter: 6 1/10"



R2.5-4-6NC

New Construction Plate

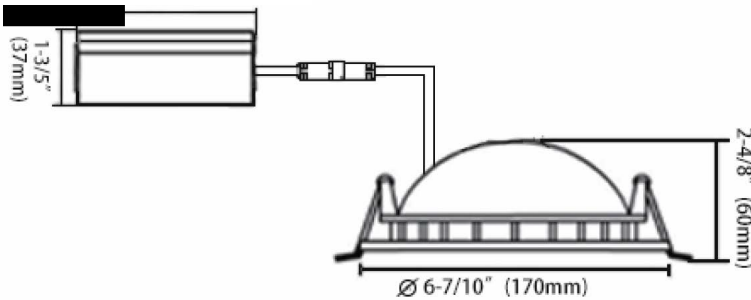

Notes:
Due to our continued efforts to improve our products, product specifications are subject to change without notice.